CSc 553 — Principles of Compilation

20 : Code Generation III

Christian Collberg
Department of Computer Science
University of Arizona
collberg@gmail.com

Copyright © 2011 Christian Collberg

February 24, 2011

1

Trivial Code Generation

2 Generating Code From Trees

- To generate code from expression trees, traverse the tree and emit machine code instructions.
- For leaves (which represent operands), generate load instructions. For interior nodes, generate arithmetic instructions.
- Assume an infinite number of registers ⇒ easy algorithm!
- Each tree node N has an attribute `'R'`, the register into which the subtree rooted at N will be computed.

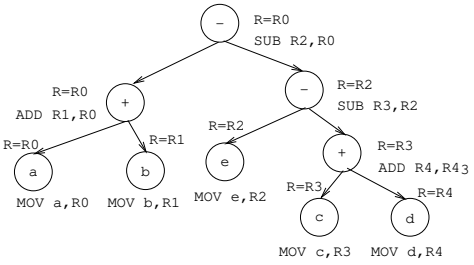

3

Generating Code From Labeled Trees

4 Optimal Ordering For Trees I

- We can generate 'optimal' code from a tree. 'Optimal' in the sense of 'smallest number of instructions generated'.
- The idea is to reorder the computations to minimize the need for register spilling.

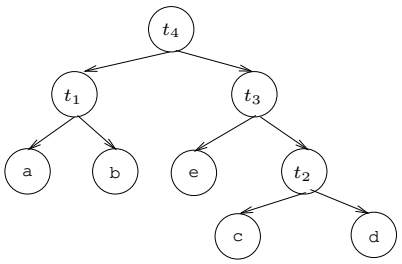

First Order	Second Order
t_1 := a + b	t_2 := c + d
t_2 := c + d	t_3 := e - t_2
t_3 := e - t_2	t_1 := a + b
t_4 := t_1 - t_3	t_4 := t_1 - t_3

5 Optimal Ordering For Trees II

- Assume two registers available. The first ordering evaluates the left subtree first, and has to spill R0 to have enough registers available for the right subtree.

First Order	Second Order	First Order	Second Order
t_1 :=a+b	t_2 :=c+d	MOV a, R0	MOV c, R0
t_2 :=c+d	t_3 :=e-t_2	ADD b, R0	ADD d, R0
t_3 :=e-t_2	t_1 :=a+b	MOV c, R1	MOV e, R1
t_4 :=t_1-t_3	t_4 :=t_1-t_3	ADD d, R1	SUB R0, R1
		MOV R0, t_1	MOV a, R0
		MOV e, R0	ADD b, R0
		SUB R1, R0	SUB R0, R1
		MOV t_1, R1	MOV R0, t_4
		SUB R0, R1	
		MOV R1, t_4	

6 The Tree Labeling Phase I

- The algorithm has two parts. First we label each sub-tree with the minimum number of registers needed to evaluate the subtree without any register spilling.

The Labeling Algorithm:

- n is a left leaf $\Rightarrow$ label(n) := 1;
- n is a right leaf $\Rightarrow$ label(n) := 0;
- n's children have labels l_L & l_R:
  - $l_L \neq l_R \Rightarrow$ label(n) := max(l_L, l_R)
  - $l_L = l_R \Rightarrow$ label(n) := $l_L + 1$

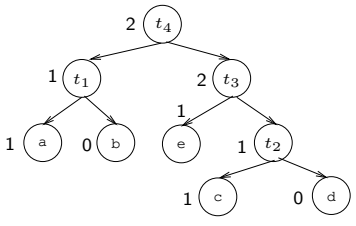

7 The Tree Labeling Phase II

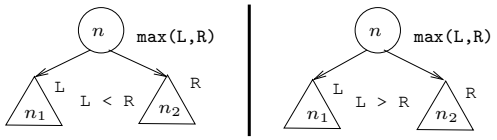

- If we have a node n with subtrees n_1 and n_2 with `L=label(`n_1`) & R=label(`n_2`) & L<R` then we can first evaluate n_2 into a register `Reg` using `R` registers. Then we use `R-1` registers to evaluate n_1.
- Similarly, if `L>R` then we can first evaluate n_1 into a register `Reg` and use the remaining `R-1` registers for n_2.
- However, if `L=R` 

we'll need one extra register to hold the result of n_1 while we evaluate n_2.

8 The Generation Phase I

- `gencode(`n`)` generates machine code for a subtree n of a labeled tree T.

`MOV M, R`	Load variable `M` into register `R`.
`MOV R, M`	Store register `R` into variable `M`.
OP `M, R`	Compute `R := R` *OP* `M`. *OP* ∈ `ADD, SUB, MUL, DIV`.
OP `R2, R1`	Compute `R1 := R1` *OP* `R2`.

- A stack `rstack` initially contains all available registers. `gencode(`n`)` generates code for subtree n using the registers on `rstack`, computing its value into the register on the top of the stack.
- A stack `tstack` of temporary memory locations is used for register spilling.

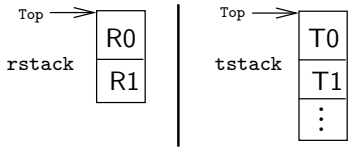

9 The Generation Phase II

Case 0 A leaf n is the leftmost child of its parent.

Case 1 A leaf n_2 is the rightmost child of its parent.

Case 2 A right subtree n_2 requires more registers than the left subtree n_1.

Case 3 A left subtree n_1 requires more registers than the right subtree n_2.

Case 4 Both subtrees require registers to be spilt.

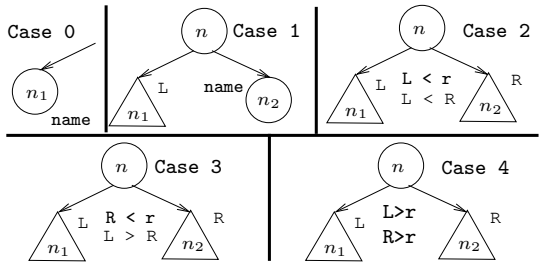

10 The Generation Phase III

Case 0



1. Generate a load instruction to load the variable into a register: `MOV name, top(rstack)`.

Case 1



1. Generate code for n_1 into register `top(rstack)`, i.e. call `gencode(`n_1`)`.
2. Generate `OP name, top(rstack)`.

11 The Generation Phase IV

Case 2



- n_1 can be evaluated without spilling, but n_2 requires more registers than n_1.
- We swap the two top registers on `rstack`, evaluate n_2 into `top(rstack)`, remove the top register, then evaluate n_1 into `top(rstack)`. Restore the stack.

1. `swap(rstack), gencode(`n_2`)`
2. `R := pop(rstack)`
3. `gencode(`n_1`)`
4. Generate `OP R, top(rstack)`
5. `push(rstack, R), swap(rstack)`

12 The Generation Phase V

Case 3



- n_2 can be evaluated without spilling, but n_1 requires more registers than n_1.
- We evaluate n_1 into `top(rstack)`, remove the top register, then evaluate n_2 into `top(rstack)`.

1. `gencode(`n_1`)`
2. `R := pop(rstack)`
3. `gencode(`n_1`)`
4. Generate `OP top(rstack), R`
5. `push(rstack, R)`

13 The Generation Phase VI

Case 4



- Neither n_1 nor n_2 can be evaluated without spilling,
- We evaluate n_2 into a temporary memory location `top(tstack)`, and then we evaluate n_1 into `top(rstack)`.

1. `gencode(`n_2`)`
2. `T := pop(tstack)`
3. Generate `MOV top(rstack), T`
4. `gencode(`n_1`)`
5. `push(tstack, T)`
6. Generate `OP T, top(rstack)`

14

Examples

15 Example I (A)




```
gencode(t4)          [R1,R0]  case2
   gencode(t3)       [R0,R1]  case3
      gencode(e)     [R0,R1]  case0
         MOV e, R1
      gencode(t2)    [R0]     case1
         gencode(c)  [R0]     case0
            MOV c, R0
      SUB R0, R1
   gencode(t1)       [R0]     case1
      gencode(a)     [R0]     case0
         MOV a, R0
      ADD b, R0
   SUB R1, R0
```

16

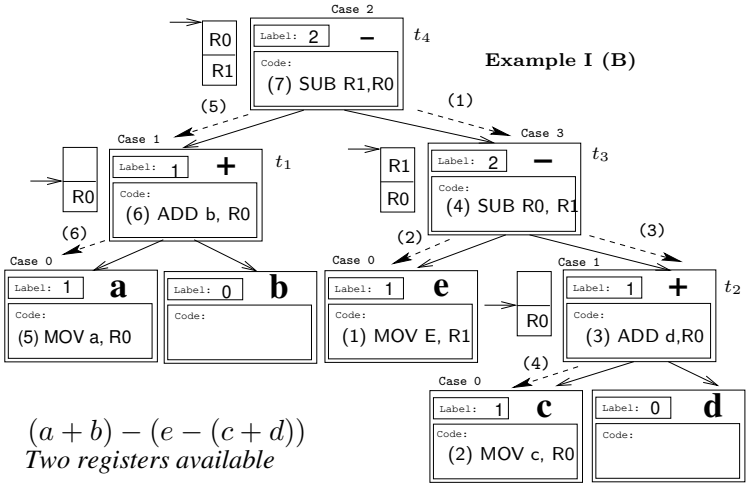

$(a + b) - (e - (c + d))$
Two registers available

17

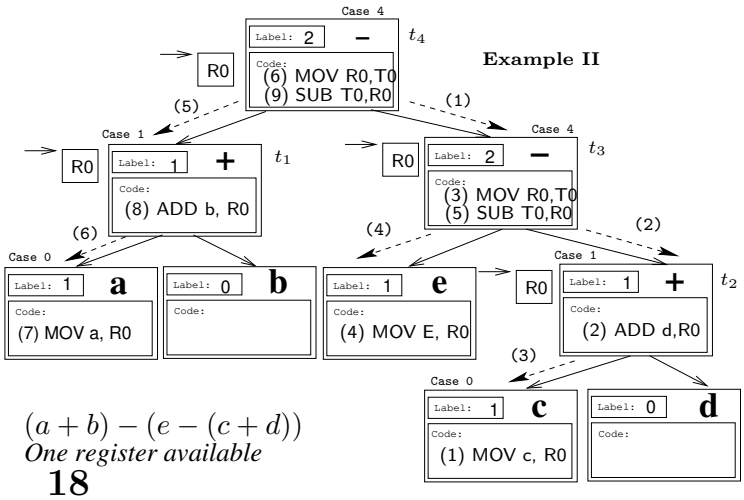

$(a + b) - (e - (c + d))$
One register available

18

Summary

19 Readings and References

- This lecture is taken from the Dragon Book:

  Code Generation From Trees: 557–559, 561–566.

  Local Optimization: 530–532, 600–602.

20 Summary I

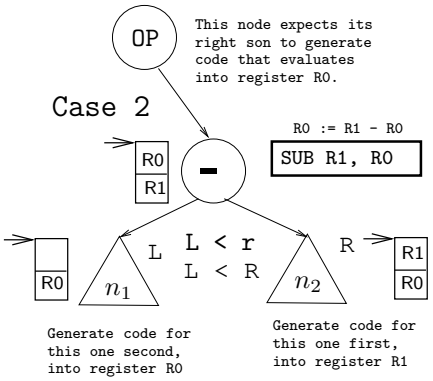

- Why do we swap registers in `Case 2`?

21

Two registers (R0,R1) are available.

Homework I

$(a + (b/c))/(d * (e + f))$

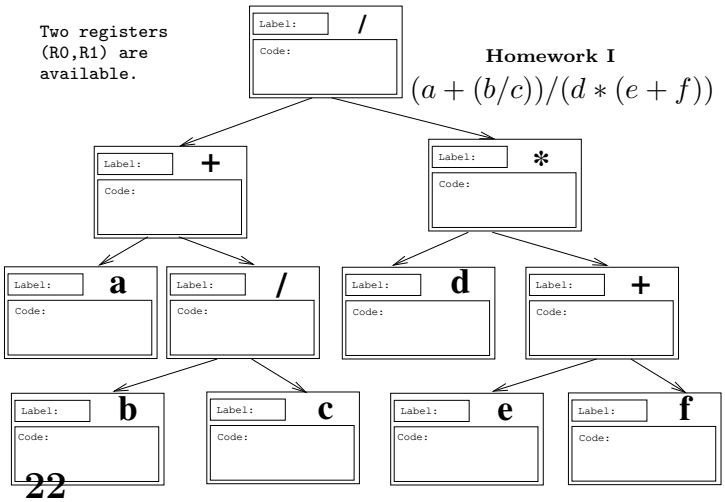

22

One register (R0) is available.

Homework II

$(a + (b/c))/(d * (e + f))$

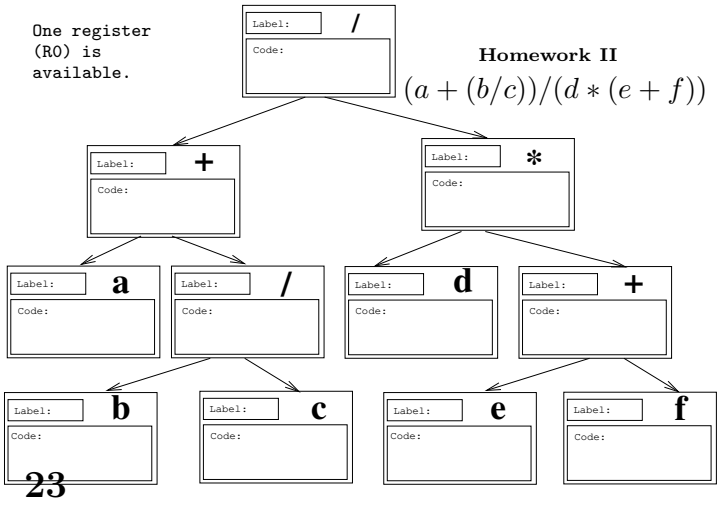

23

The machine has two registers R0 and R1, and an infinite number of temporary memory locations T0,T1,...
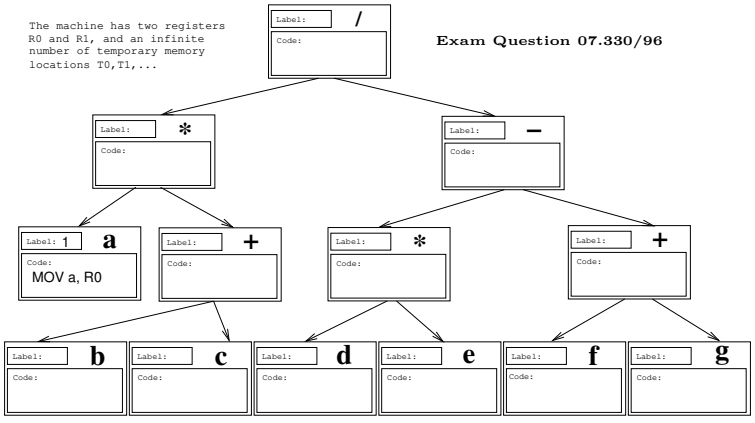
Exam Question 07.330/96