



CSc 110, Spring 2017

Lecture 7: Graphics, return values and math

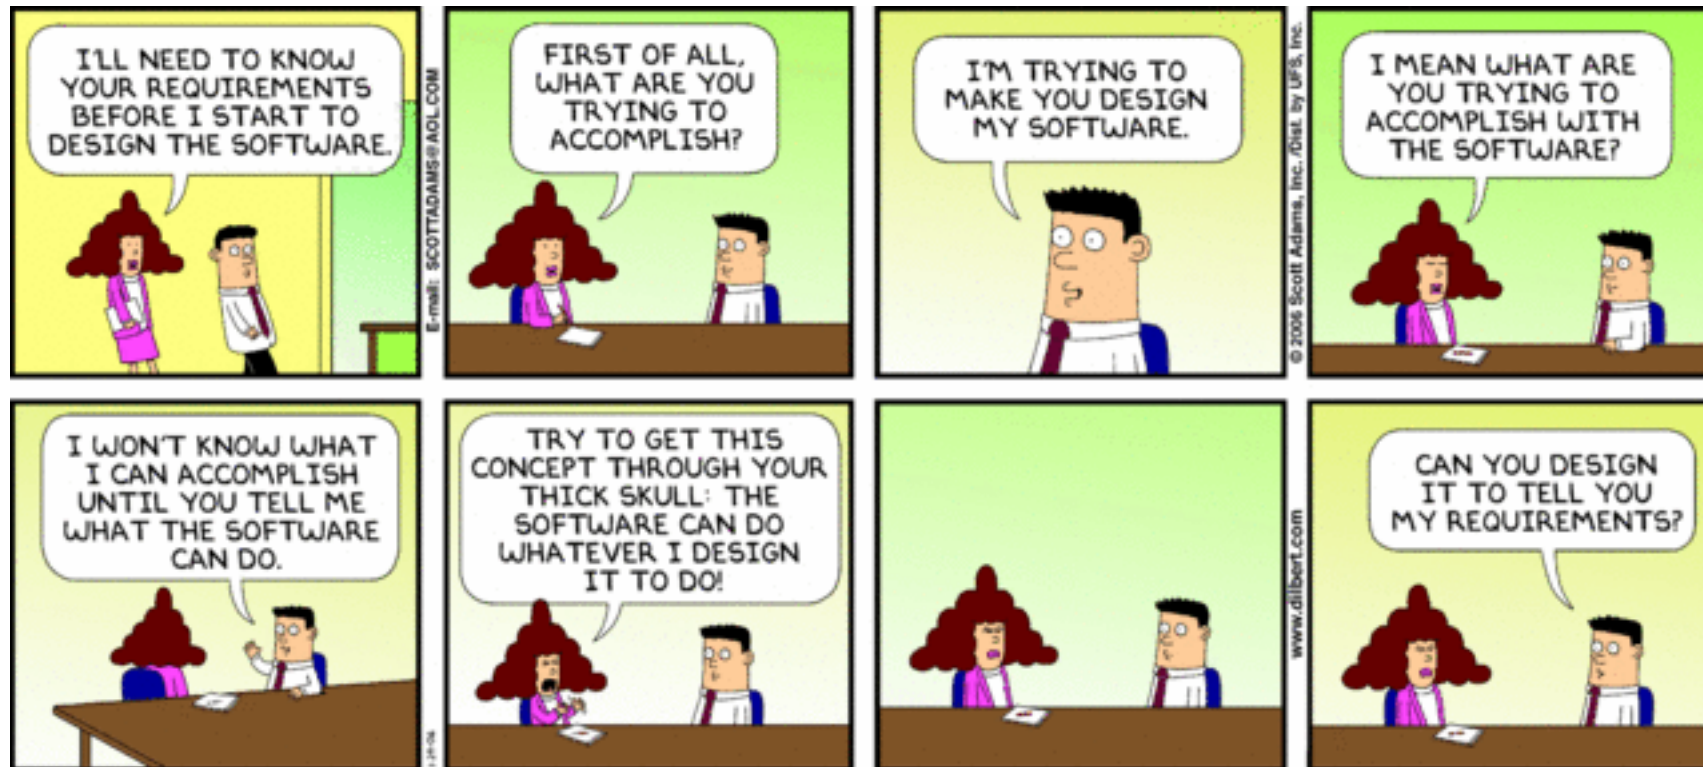



Parameterized figures

- Modify the car-drawing function so that it can draw many cars, such as in the following image.
 - Top-left corners: (10, 30), (150, 10)
 - Hint: We must modify our `draw_car` function to accept x/y coordinates as parameters.

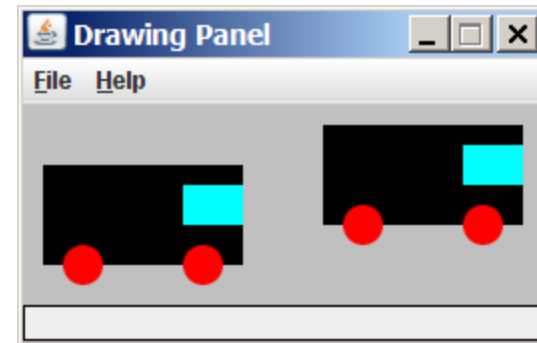

Drawing parameter question

- Modify `draw_car` to allow the car to be drawn at any size.
 - Existing car: size 100. Second car: (150, 10), size 50.
- Once you have this working, use a `for` loop with your function to draw a line of cars, like the picture at right.
 - Start at (10, 130), each size 40, separated by 50px.

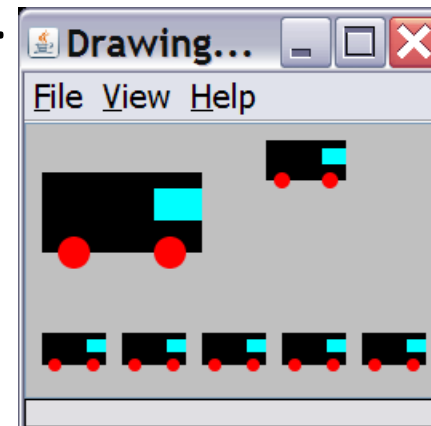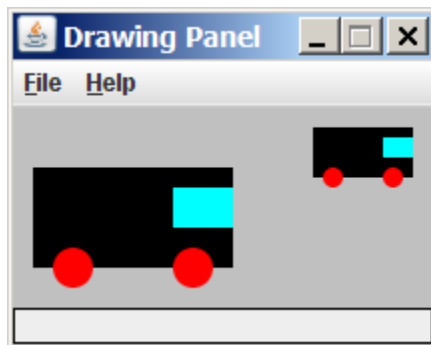


Drawing parameter answer

```
def main():
    panel = DrawingPanel(260, 100, background="light gray")
    draw_car(panel, 10, 30, 100)
    draw_car(panel, 150, 10, 50)
    for i in range(0, 5):
        draw_car(panel, 10 + i * 50, 130, 40);

def draw_car(p, x, y, size):
    p.canvas.create_rectangle(x, y, x + size, y + size / 2, fill="black")

    p.canvas.create_oval(x + size / 10, y + size / 10 * 4, x + size / 10 * 3, y +
                        size / 10 * 6, fill="red", width=0)
    p.canvas.create_oval(x + size / 10 * 7, y + size / 10 * 4, x + size / 10 * 9,
                        y + size / 10 * 6, fill="red", width=0)

    p.canvas.create_rectangle(x + size / 10 * 7, y + size / 10, x + size,
                              y + size / 10 * 3, fill="cyan", width=0)
```

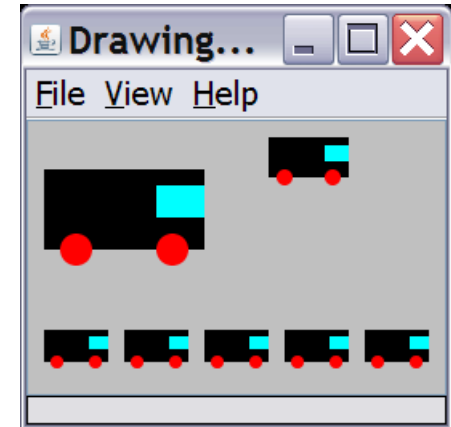

Python's Math class

Method name	Description
<code>ceil(value)</code>	rounds up
<code>floor(value)</code>	rounds down
<code>log(value, base)</code>	logarithm
<code>sqrt(value)</code>	square root
<code>sinh(value)</code> <code>cosh(value)</code> <code>tanh(value)</code>	sine/cosine/tangent of an angle in radians
<code>degrees(value)</code> <code>radians(value)</code>	convert degrees to radians and back

Constant	Description
<code>e</code>	2.7182818...
<code>pi</code>	3.1415926...

`from math import *` necessary to use the above functions

Other math functions:


Function name	Description
<code>abs(value)</code>	absolute value
<code>min(value1, value2)</code>	smaller of two values
<code>max(value1, value2)</code>	larger of two values
<code>round(value)</code>	nearest whole number

No output?

- Simply calling these functions produces no visible result.
 - `sqrt(81)` `# no output`
- Math function calls use a Python feature called *return values* that cause them to be treated as expressions.
- The program runs the function, computes the answer, and then "replaces" the call with its computed result value.
 - `sqrt(81)` `# no output`
`9.0` `# no output`
- To see the result, we must print it or store it in a variable.
 - `result = sqrt(81)`
 - `print(result)` `# 9.0`

Return

- **return:** To send out a value as the result of a function.
 - Return values send information *out* from a function to its caller.
 - A call to the function can be used as part of an expression.
 - (Compare to parameters which send values *into* a function)

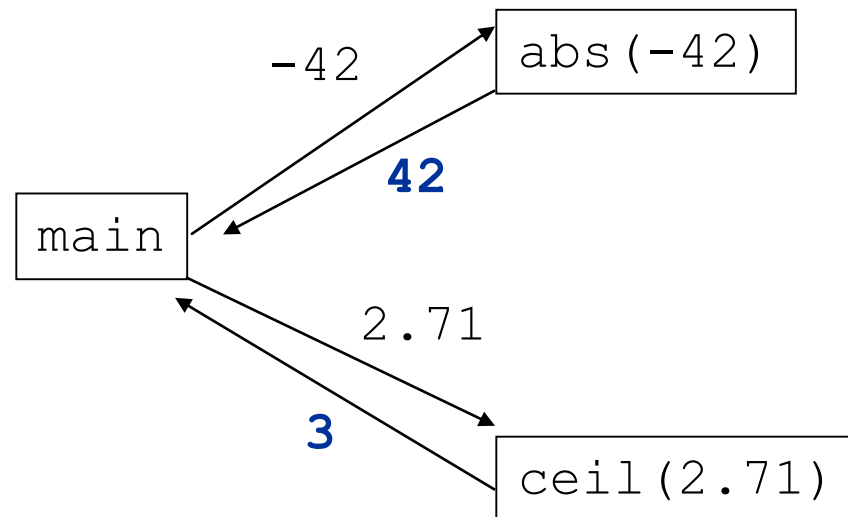

Math questions

- Evaluate the following expressions:
 - `abs(-1.23)`
 - `sqrt(121.0) - sqrt(256.0)`
 - `round(pi) + round(e)`
 - `ceil(6.022) + floor(15.9994)`
 - `abs(min(-3, -5))`
- `max` and `min` can be used to bound numbers.
Consider a variable named `age`.
 - What statement would replace negative ages with 0?
 - What statement would cap the maximum age to 40?

Quirks of real numbers

- Some `float` values print poorly (too many digits).

```
result = 1.0 / 3.0
print(result)          # 0.3333333333333333
```

- The computer represents `floats` in an imprecise way.

```
print(0.1 + 0.2)
```

- Instead of 0.3, the output is `0.30000000000000004`

Returning a value

```
def name (parameters) :  
    statements  
    ...  
    return expression
```

- When Python reaches a return statement:
 - it evaluates the expression
 - it substitutes the return value in place of the call
 - it goes back to the caller and continues after the function call

Return examples

```
# Converts degrees Fahrenheit to Celsius.
```

```
def f_to_c(degrees_f):  
    degrees_c = 5.0 / 9.0 * (degrees_f - 32)  
    return degrees_c
```

```
# Computes triangle hypotenuse length given its side lengths.
```

```
def hypotenuse(a, b):  
    c = sqrt(a * a + b * b)  
    return c
```

- You can shorten the examples by returning an expression:

```
def f_to_c(degrees_f):  
    return 5.0 / 9.0 * (degrees_f - 32)
```

Common error: Not storing

- Many students incorrectly think that a `return` statement sends a variable's name back to the calling function.

```
def main():  
    slope(0, 0, 6, 3)  
    print("The slope is " + result); # ERROR: cannot find symbol: result  
  
def slope(x1, x2, y1, y2):  
    dy = y2 - y1  
    dx = x2 - x1  
    result = dy / dx  
    return result
```

Fixing the common error

- Returning sends the variable's *value* back. Store the returned value into a variable or use it in an expression.

```
def main():  
    s = slope(0, 0, 6, 3)  
    print("The slope is " + str(s))
```

```
def slope(x1, x2, y1, y2):  
    dy = y2 - y1  
    dx = x2 - x1  
    result = dy / dx  
    return result
```

Exercise

- In physics, the *displacement* of a moving body represents its change in position over time while accelerating.
 - Given initial velocity v_0 in m/s, acceleration a in m/s^2 , and elapsed time t in s, the displacement of the body is:
 - Displacement = $v_0 t + \frac{1}{2} a t^2$
- Write a method `displacement` that accepts v_0 , a , and t and computes and returns the change in position.
 - example: `displacement(3.0, 4.0, 5.0)` returns 65.0

Exercise solution

```
def displacement(v0, a, t):  
    d = v0 * t + 0.5 * a * (t ** 2)  
    return d
```

Exercise

- If you drop two balls, which will hit the ground first?
 - Ball 1: height of 600m, initial velocity = 25 m/sec downward
 - Ball 2: height of 500m, initial velocity = 15 m/sec downward
- Write a program that determines how long each ball takes to hit the ground (and draws each ball falling).
- Total time is based on the force of gravity on each ball.
 - Acceleration due to gravity $\cong 9.81 \text{ m/s}^2$, downward
 - Displacement = $v_0 t + \frac{1}{2} a t^2$

Ball solution

```
# Simulates the dropping of two balls from various heights.
```

```
def main():
```

```
    panel = DrawingPanel(600, 600)
```

```
    ball1x = 100
```

```
    ball1y = 0
```

```
    v01 = 25
```

```
    ball2x = 200
```

```
    ball2y = 100
```

```
    v02 = 15
```

```
# draw the balls at each time increment
```

```
    for time in range(0, 60, 1):
```

```
        disp1 = displacement(v01, time/10, 9.81)
```

```
        panel.canvas.create_oval(ball1x, ball1y + disp1, ball1x + 10, ball1y + 10 + disp1)
```

```
        disp2 = displacement(v02, time/10, 9.81)
```

```
        panel.canvas.create_oval(ball2x, ball2y + disp2, ball2x + 10, ball2y + 10 + disp2)
```

```
        panel.sleep(50)    # pause for 50 ms
```

```
        panel.canvas.create_rectangle(0, 0, 600, 600, fill="white", width=0)
```

```
...
```