CSc 553

Principles of Compilation

31 : Dominators and Natural Loops

Department of Computer Science
University of Arizona

collberg@gmail.com

Copyright © 2011 Christian Collberg

Introduction

Loop Invariants

- Let C be a computation in a loop body. C is **invariant** if it computes the same value during all iterations. C can sometimes be moved out of the loop.

```
K := 1; I := 2;
REPEAT
  A := K + 1; I := I + A;
UNTIL I <= 10;
K := K + A;
```



- How do we know what is a loop???

Loops

Loop Terminology

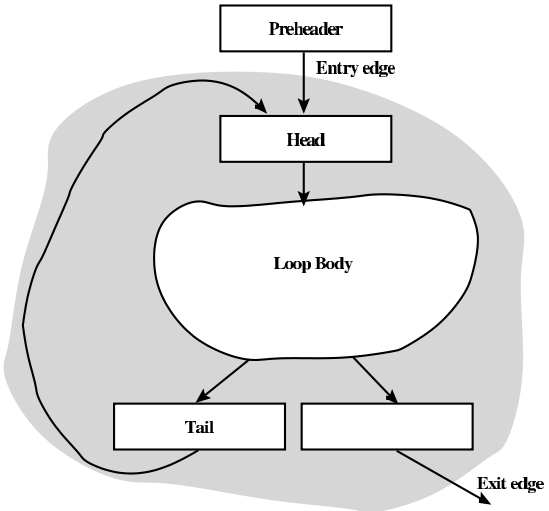

Preheaders

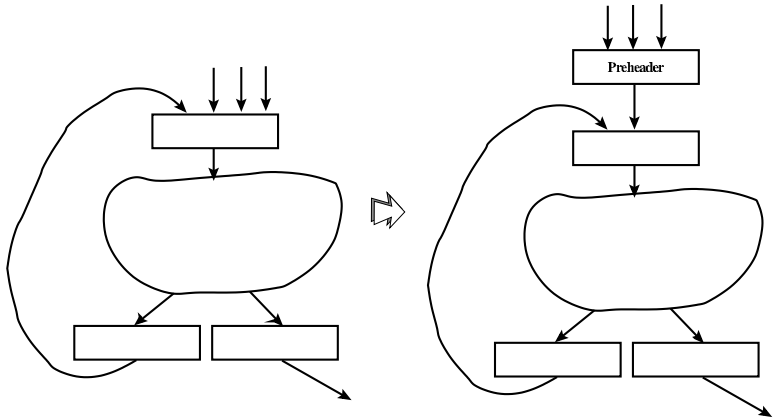

- A preheader is useful, for example if we want to move out loop-invariant computations.
- Not all loops have preheaders — but we can always add one.

Dominators

Dominators

- To detect what the loops are in a program we first have to perform a *dominator analysis.*
- Definition:

  A node d dominates a node n if every path from the entry node to n must go through d.



Dominators

- Notation: d dom n — d strictly dominates n.
- Intuition: Given a node n, which blocks are guaranteed to have executed prior to executing n.



- Every node dominates itself: d dom d.

Strict Dominator

- Definition:

  A node d *strictly dominates* a node n if d dominates n and $d \neq n$.

- Notation: d sdom n — d strictly dominates n.



Immediate Dominator

- Definition:

  The immediate dominator d of a node n is the unique node that strictly dominates n but does not strictly dominate any other node that strictly dominates n.

- Entry nodes don't have an immediate dominator.
- Notation: d idom n — d immediately dominates n.



Post dominator

A node d post dominates a node n if every path from n to the exit node must go through d.

- Notation: d pdom n — d post dominates n.
- Intuition: Given a node n, which blocks are guaranteed to execute *after* executing n.

Natural Loop

- Definition:

  A back edge $b \rightarrow h$, where $h \,\mathrm{dom}\, b$, induces a *natural loop* consisting of all nodes x, where $h \,\mathrm{dom}\, x$ and there there is a path from x to b not containing b.

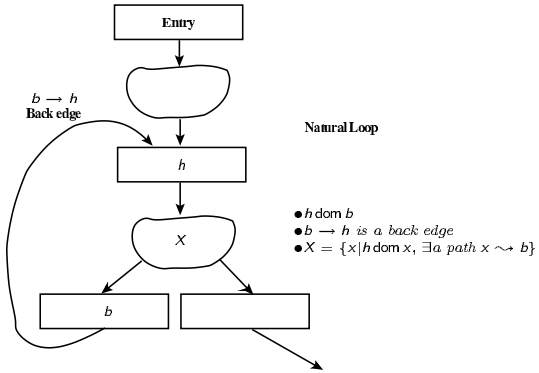

Example — Not a Natural Loop

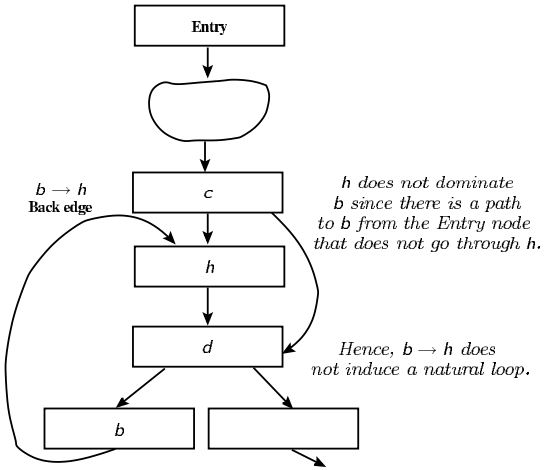

Computing Dominators

Dataflow Equations

- The dominators of a node n are given by

$$\begin{aligned} \mathrm{dom}(\text{entry node}) &= \{\text{entry node}\} \\ \mathrm{dom}(n) &= \{n\} \cup \Big(\bigcap_{\text{preds } p \text{ of } n} \mathrm{dom}(p) \Big) \end{aligned}$$

- The dominator of the entry node is the entry node itself.
- The set of dominators for a node n is the intersection of the set of dominators for all predecessors of n.
- n is also in the set of dominators for n.

Dataflow Equations — Intuition

$$\mathrm{dom}(n) = \{n\} \cup \Big(\bigcap_{\text{preds } p \text{ of } n} \mathrm{dom}(p) \Big)$$

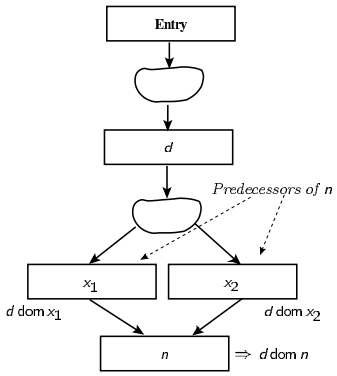

- If d dominates all predecessors of n, then it also dominates n

Algorithm

- N is the set of all nodes.
- n_0 is the entry node.

```
dom(n0) := {n0};
FOR EACH n ∈ N − {n0} DO
    dom(n) := N;
WHILE CHANGES IN ANY dom(n) DO
    FOR EACH n ∈ N − {n0} DO
        dom(n) := {n} ∪ (⋂preds p of n dom(p))
```

Example 1

Example 1 — Initialization

```
K:=1;
I:=2;
REPEAT
  A:=K+1;
  I:=I+A;
UNTIL I<=10;
K:=K+A;
```

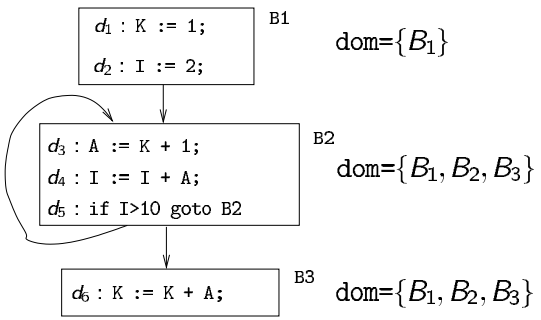

Example 1 — First Iteration



$\text{dom}=\{B_1\}$

$\text{dom}=\{B_2\} \cup (\{B_1\} \cap \{B_1, B_2, B_3\})$
$=\{B_1, B_2\}$

$\text{dom}=\{B_3\} \cup (\{B_1, B_2\})$
$=\{B_1, B_2, B_3\}$

Example 1 — Final Result

- A back edge $b \rightarrow h$, where $h \,\text{dom}\, b$, induces a *natural loop* consisting of all nodes x, where $h \,\text{dom}\, x$ and there there is a path from x to b not containing b.

$B_2 \,\text{dom}\, B_2$



$\text{dom}=\{B_1\}$

$\text{dom}=\{B_1, B_2\}$

$\text{dom}=\{B_1, B_2, B_3\}$

Example 2

Example 2

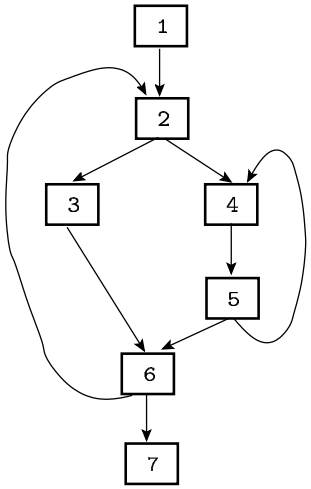

Example 2 — Initialization

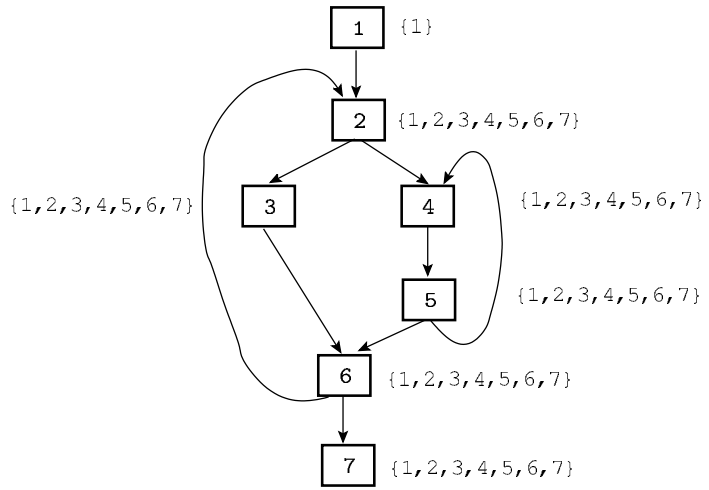

Example 2 — First iteration

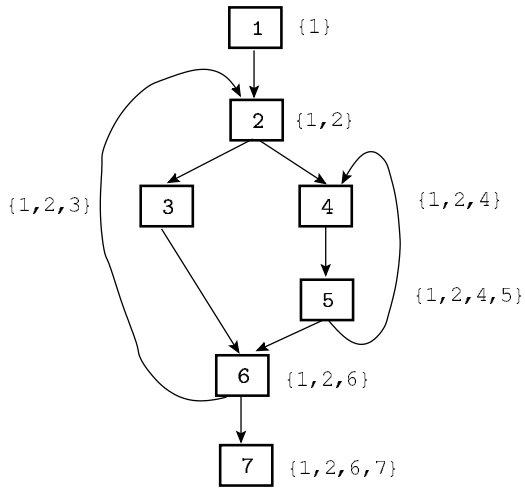

Example 2 — Identifying loops

Back edge $b \to h$, $h \operatorname{dom} b$, induces a loop with all nodes x, where $h \operatorname{dom} x$ and there there is a path $x \rightsquigarrow b$ not containing b.

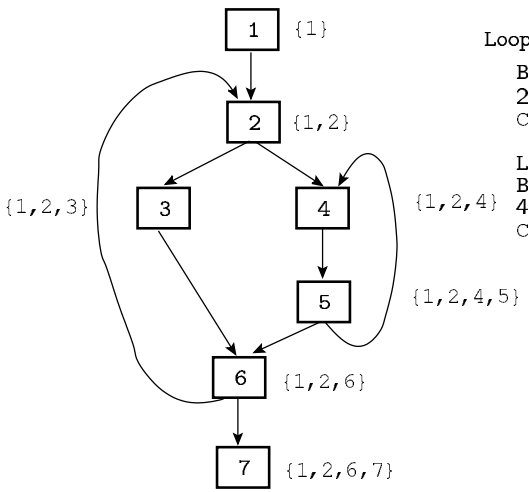

Loop 1:

Back edge: $6 \to 2$

$2 \operatorname{dom} 6$

Contains: {2,3,4,5,6}

Loop 2:

Back edge: $5 \to 4$

$4 \operatorname{dom} 5$

Contains: {4,5}

Summary

Summary

- Each node dominates itself.
- If x dominates y, and y dominates z, then x dominates z.
- If x dominates z and y dominates z, then either x dominates y or y dominates x.